


RC B600~1600

インバートボックスカルバート

●設計条件

適用土かぶり	0.2~3.0m
自動車荷重	T-25
土の単位体積重量	18kN/m ³
土圧係数	0.5

●断面形状

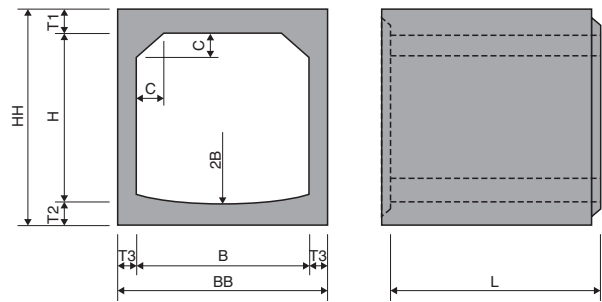

●規格寸法

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底版厚 T2	側壁厚 T3	ハンチ厚 C	参考質量 (kg)
600	500		760				1855
	600		860				1985
	700	2000	860	130	130	100	2115
	800	860	1060	130	130	100	2245
	900		1160				2375
	1000		1260				2505
700	500		760				2000
	600		860				2130
	700		960				2260
	800	2000	960	130	130	100	2390
	900		1160				2520
	1000		1260				2650
800	1100		1360				2780
	500		760				2145
	600		860				2275
	700		960				2405
	800	2000	1060	130	130	100	2535
	900		1160				2665
900	1000		1260				2795
	1100		1360				2925
	1200		1460				3055
	600		860				2420
	700		960				2550
	800		1060				2680
1000	900	2000	1160	130	130	100	2810
	1000	1160	1260	130	130	100	2940
	1100		1360				3070
	1200		1460				3200
	1300		1560				3330
	600		860				2635
1600	700		960				2765
	800		1060				2895
	900		1160				3025
	1000	2000	1260	130	130	150	3155
	1100	1260	1360	130	130	150	3285
	1200		1460				3415
	1300		1560				3545
	1400		1660				3675
	1500		1760				3805
	1000		1320				4595
	1100		1420				4735
	1200	2000	1520	160	160	140	4875
	1300	1520	1620	160	160	140	5015
	1400		1720				5155
	1500		1820				5295
1000		1340				5110	
1100		1440				5260	
1200		1540				5410	
1300	2000	1640	170	170	150	5560	
1400		1740				5710	
1500		1840				5860	
1600		1940				6010	

※上表に規格がない場合は、お近くの営業員までご相談ください。

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底版厚 T2	側壁厚 T3	ハンチ厚 C	参考質量 (kg)
1100	700		960				2915
	800		1060				3045
	900		1160				3175
	1000		1260				3305
	1100	2000	1360	130	130	130	3435
	1200		1460				3565
1200	1300		1560				3695
	1400		1660				3825
	1500		1760				3955
	800		1060				3200
	900		1160				3330
	1000		1260				3460
1300	1100	2000	1360	130	130	150	3590
	1200	1460	1460	130	130	130	3720
	1300		1560				3850
	1400		1660				3980
	1500		1760				4110
	900		1180				3645
1400	1000		1280				3775
	1100		1380				3905
	1200	2000	1480	140	140	130	4035
	1300		1580				4165
	1400		1680				4295
	1500		1780				4425
1000		1300				4110	
1500	1100		1400				4240
	1200	2000	1500	150	150	130	4370
	1300	1660	1600	150	150	130	4500
	1400		1700				4630
	1500		1800				4760
	1000		1320				4595
1600	1100		1420				4735
	1200	2000	1520	160	160	140	4875
	1300	1780	1620	160	160	140	5015
	1400		1720				5155
	1500		1820				5295
	1000		1340				5110
	1100		1440				5260
	1200		1540				5410
	1300	2000	1640	170	170	150	5560
	1400		1740				5710
	1500		1840				5860
	1600		1940				6010

カルバート

道路・側溝

防護柵基礎

擁壁

補強土

地盤改良

消・融雪

その他


RC B1700~3000

インバートボックスカルバート

●設計条件

適用土かぶり	0.2~3.0m
自動車荷重	T-25
土の単位体積重量	18kN/m ³
土圧係数	0.5

●断面形状

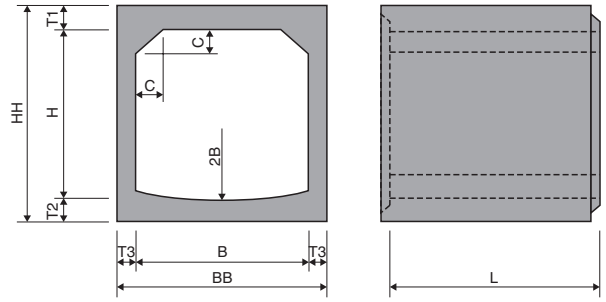

●規格寸法

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底版厚 T2	側壁厚 T3	ハチ厚 C	参考質量 (kg)
1700	1100		1440				5465
	1200		1540				5615
	1300		1640				5765
	1400	2000	1740	170	170	150	5915
	1500		1840				6065
	1600		1940				6215
	1700		2040				6365
1800	1200		1540				5820
	1300		1640				5970
	1400		1740				6120
	1500	2000	1840	170	170	150	6270
	1600		1940				6420
	1700		2040				6570
1800		2140				6720	
1900	1300		1660				6565
	1400		1760				6725
	1500		1860				6885
	1600	2000	1960	180	180	160	7045
	1700		2060				7205
	1800		2160				7365
	1900		2260				7525
2000	1300		1660				6875
	1400		1760				7035
	1500		1860				7195
	1600	2000	1960	180	180	160	7355
	1700	2320	2060			200	7515
	1800		2160				7675
	1900		2260				7835
	2000		2360				7995
2200	1500		1900				6395
	1600		2000				6530
	1700		2100				6665
	1800	1500	2200	200	200	180	6800
	1900	2560	2300				6935
	2000		2400				7070
	2100		2500				7205
	2200		2600				7340
2400	1600		2020				7260
	1700		2120				7405
	1800		2220				7545
	1900		2320				7690
	2000	1500	2420	210	210	190	7830
	2100		2520				7975
	2200		2620				8115
	2300		2720				8260
2400		2820				8400	

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底版厚 T2	側壁厚 T3	ハチ厚 C	参考質量 (kg)
2500	1600		2040				7825
	1700		2140				7975
	1800		2240				8125
	1900		2340				8275
	2000	1500	2440	220	220	200	8425
	2100	2900	2540				8575
	2200		2640				8725
	2300		2740				8875
2400		2840				9025	
2500		2940				9175	
2600	1600		2080				8795
	1700		2180				8960
	1800		2280				9125
	1900		2380				9290
	2000	1500	2480	240	240	220	9455
	2100	3040	2580				9620
	2200		2680				9785
	2300		2780				9950
2400		2880				10115	
2500		2980				10280	
2800	1600		2080				6160
	1700		2180				6270
	1800		2280				6380
	1900		2380				6490
	2000	1000	2480	240	240	220	6600
	2100	3240	2580				6710
	2200		2680				6820
	2300		2780				6930
2400		2880				7040	
2500		2980				7150	
3000	1600		2120				7140
	1700		2220				7260
	1800		2320				7380
	1900		2420				7500
	2000	1000	2520	260	260	240	7620
	2100	3480	2620				7740
	2200		2720				7860
	2300		2820				7980
2400		2920				8100	
2500		3020				8220	

※上表に規格がない場合は、お近くの営業員までご相談ください。


RC B3200~3400

インバートボックスカルバート

●設計条件

適用土かぶり	0.2~3.0m
自動車荷重	T-25
土の単位体積重量	18kN/m ³
土圧係数	0.5

●断面形状

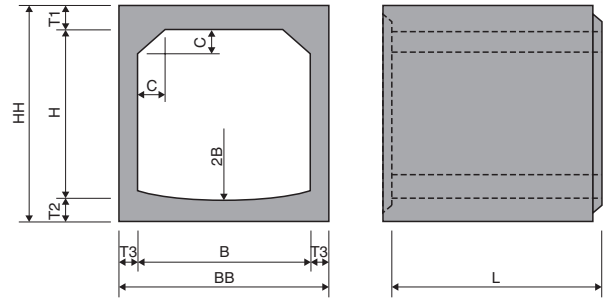

●規格寸法

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底版厚 T2	側壁厚 T3	ハンチ厚 C	参考質量 (kg)		
3200	1600		2220				8495		
	1700		2320				8620		
	1800		2420				8745		
	1900		2520				8870		
	2000		2620				8995		
	2100	1000	3700	2720	310	310	250	300	9120
	2200		2820					9245	
2300		2920					9370		
2400		3020					9495		
2500		3120					9620		
3400	1800		2420				9125		
	1900		2520				9250		
	2000	1000	3900	2620	310	310	250	300	9375
	2100		2720				9500		
	2200		2820				9625		
2300		2920				9750			

※上表に規格がない場合は、お近くの営業員までご相談ください。



カルバート

道路・側溝

防護柵基礎

擁

壁

補強土

地盤改良

消・融雪

その他