


縦方向連結形アーチカルバート(P規格)

PC鋼材により縦締め(目地フラット)します。

●断面形状

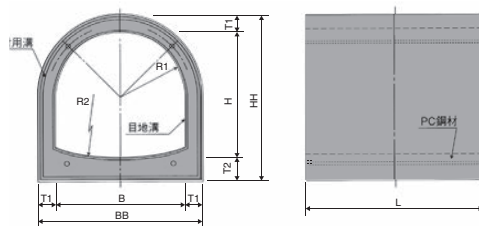

●規格寸法

(単位:mm)

呼び名 内幅B×内高H×製品長L	外幅 BB	外高 HH	頂版厚 T1	底板厚 T2	R寸法		参考質量(kg/本)			
					R1	R2	I型・II型	特厚型		
1200	1200	2000	1460(1520)	1470(1550)	130(160)	140(190)	600	2400	3.310	4.260
	1320	2000	1460(1520)	1590(1670)	130(160)	140(190)	600	2400	3.470	4.460
	1440	2000	1460(1520)	1710(1790)	130(160)	140(190)	600	2400	3.620	4.650
1500	1500	2000	1780(1860)	1800(1890)	140(180)	160(210)	750	3000	4.510	5.910
	1650	2000	1780(1860)	1950(2040)	140(180)	160(210)	750	3000	4.720	6.180
	1800	2000	1780(1860)	2100(2190)	140(180)	160(210)	750	3000	4.930	6.450
1800	1260	2000	2120	1590	160	170	900	3600	5.180	—
	1440	2000	2120	1770	160	170	900	3600	5.470	—
	1620	2000	2120	1950	160	170	900	3600	5.760	—
	1800	2000	2120(2200)	2130(2230)	160(200)	170(230)	900	3600	6.050	7.810
	1980	2000	2120(2200)	2310(2410)	160(200)	170(230)	900	3600	6.330	8.170
2000	2160	2000	2120(2200)	2490(2590)	160(200)	170(230)	900	3600	6.620	8.530
	1400	1500	2340	1760	170	190	1000	4000	4.670	—
	1600	1500	2340	1960	170	190	1000	4000	4.920	—
	1800	1500	2340	2160	170	190	1000	4000	5.180	—
	2000	1500	2340(2440)	2360(2490)	170(220)	190(270)	1000	4000	5.430	7.310
	2200	1500	2340(2440)	2560(2690)	170(220)	190(270)	1000	4000	5.690	7.640
2200	2400	1500	2340(2440)	2760(2890)	170(220)	190(270)	1000	4000	5.940	7.970
	1540	1500	2560	1920	180	200	1100	4400	5.420	—
	1760	1500	2560	2140	180	200	1100	4400	5.720	—
	1980	1500	2560	2360	180	200	1100	4400	6.010	—
	2200	1500	2560(2660)	2580(2720)	180(230)	200(290)	1100	4400	6.310	8.460
2500	2420	1500	2560(2660)	2800(2940)	180(230)	200(290)	1100	4400	6.610	8.840
	2640	1500	2560(2660)	3020(3160)	180(230)	200(290)	1100	4400	6.900	9.220
	1750	1500	2880	2150	190	210	1250	5000	6.480	—
	2000	1500	2880	2400	190	210	1250	5000	6.840	—
	2250	1500	2880	2650	190	210	1250	5000	7.200	—
	2500	1500	2880(3000)	2900(3070)	190(250)	210(320)	1250	5000	7.550	10.490
2800	2750	1500	2880(3000)	3150(3320)	190(250)	210(320)	1250	5000	7.910	10.960
	3000	1500	2880(3000)	3400(3570)	190(250)	210(320)	1250	5000	8.270	11.420
	1960	1000	3220	2400	210	230	1400	5600	5.330	—
	2240	1000	3220	2680	210	230	1400	5600	5.630	—
	2520	1000	3220	2960	210	230	1400	5600	5.920	—
	2800	1000	3220(3340)	3240(3400)	210(270)	230(330)	1400	5600	6.220	8.310
3000	3080	1000	3220(3340)	3520(3680)	210(270)	230(330)	1400	5600	6.510	8.690
	3200	1000	3220(3340)	3640(3800)	210(270)	230(330)	1400	5600	6.640	8.850
	2100	1000	3440	2560	220	240	1500	6000	5.980	—
	2400	1000	3440	2860	220	240	1500	6000	6.310	—
	2700	1000	3440	3160	220	240	1500	6000	6.640	—
3000	3000	1000	3440(3560)	3460(3640)	220(280)	240(360)	1500	6000	6.970	9.380
	3200	1000	3440(3560)	3660(3840)	220(280)	240(360)	1500	6000	7.190	9.660

()内数字は特厚型の寸法を示しています。